



# Test Report: LRS-150-24

---

150W Single Output Switching Power Supply

## ■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

## ■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

## ■ RELIABILITY TEST


ENVIRONMENT TEST

## DESIGN VERIFY TEST

### OUTPUT FUNCTION TEST


| NO | TEST ITEM                     | SPECIFICATION  | TEST CONDITION   | RESULT                                       |
|----|-------------------------------|--|--|--|
| 1  | OUTPUT VOLTAGE ADJUST RANGE   | CH1: 21.6 V~ 28.8 V  | I/P : 230 VAC<br>I/P : 115 VAC<br>O/P : MIN LOAD<br>Ta : 25°C                | 20.61V~30.35V/230VAC<br>20.61V~30.35V/115VAC |
| 2  | OUTPUT VOLTAGE(Max) TOLERANCE | V1: 1 %~ -1 %  | I/P: 100~132VAC/200~264VAC<br>by switch<br>O/P:FULL/ MIN. LOAD<br>Ta:25°C    | V1: 0 %~0.04%                                |
| 3  | LINE REGULATION (Max)         | V1: 0.5 %~ -0.5 %  | I/P: 100~132VAC/200~264VAC<br>by switch<br>O/P:FULL LOAD<br>Ta:25°C          | V1: 0%~0.04%                                 |
| 4  | LOAD REGULATION(Max)          | V1: 0.5 %~ -0.5 %  | I/P: 230VAC<br>O/P:FULL ~MIN LOAD<br>Ta:25°C                                 | V1: 0%~0 %                                   |
| 5  | OVER/UNDERSHOOT TEST          | < ±5%  | I/P: 230VAC<br>O/P:FULL LOAD<br>Ta:25°C                                      | <5%  |
| 6  | RIPPLE & NOISE(Max)           | V1: 200 mVp-p  | I/P:230VAC<br>O/P:FULL LOAD<br>Ta:25°C                                       | V1: 43.0 mVp-p                               |
|    |                               | <p>high frequency :</p>  | <p>low frequency :</p>   |  |
| 7  | SET UP TIME(Max)              | 230VAC/500ms<br>115VAC/500ms   | I/P : 230 VAC<br>I/P : 115 VAC<br>O/P : FULL LOAD<br>Ta : 25°C               | 230VAC/216 ms<br>115VAC/ 222ms               |
|    |                               | INPUT=230VAC/50HZ @ FULL LOAD<br>CH1 : Output Voltage CH2 : AC Input Voltage | INPUT=115VAC/60HZ @ FULL LOAD<br>CH1 : Output Voltage CH2 : AC Input Voltage |  |

|   |                                    |  |   |
|---|------------------------------------|--|---|
|   |                                    |  |   |
| <p>8</p> <p>RISE TIME (Max)</p>   | <p>230VAC/30ms<br/>115VAC/30ms</p> | <p>I/P : 230 VAC<br/>I/P : 115 VAC<br/>O/P : FULL LOAD<br/>Ta : 25°C</p>   | <p>230VAC/6.6ms<br/>115VAC/ 6.8ms</p>   |
| <p>INPUT=230VAC/50HZ @ FULL LOAD</p> <p>CH1 : Output Voltage</p>                        |                                    | <p>INPUT=115VAC/60HZ @ FULL LOAD</p> <p>CH1 : Output Voltage</p>   |   |
| <p>9</p> <p>HOLD UP TIME (Typ.)</p>   | <p>230VAC/30ms<br/>115VAC/30ms</p> | <p>I/P : 230 VAC<br/>I/P : 115 VAC<br/>O/P : FULL LOAD<br/>Ta : 25°C</p>   | <p>230VAC/ 41.2ms<br/>115VAC/36.8ms</p> |
| <p>10</p> <p>DYNAMIC LOAD</p>   | <p>V1: 2400 mVp-p</p>              | <p>I/P: 230VAC<br/>O/P:<br/>(1)FULL /50% LOAD 50%DUTY / 120HZ<br/>(2)FULL /50% LOAD 50%DUTY / 1KHZ<br/>Ta:25°C</p> | <p>330mVp-p<br/>244mVp-p</p>            |
| <p>INPUT=230VAC/50HZ @ FULL LOAD</p> <p>CH1 : Output Voltage CH2 : AC Input Voltage</p> |                                    | <p>INPUT=115VAC/60HZ @ FULL LOAD</p> <p>CH1 : Output Voltage CH2 : AC Input Voltage</p>                            |   |

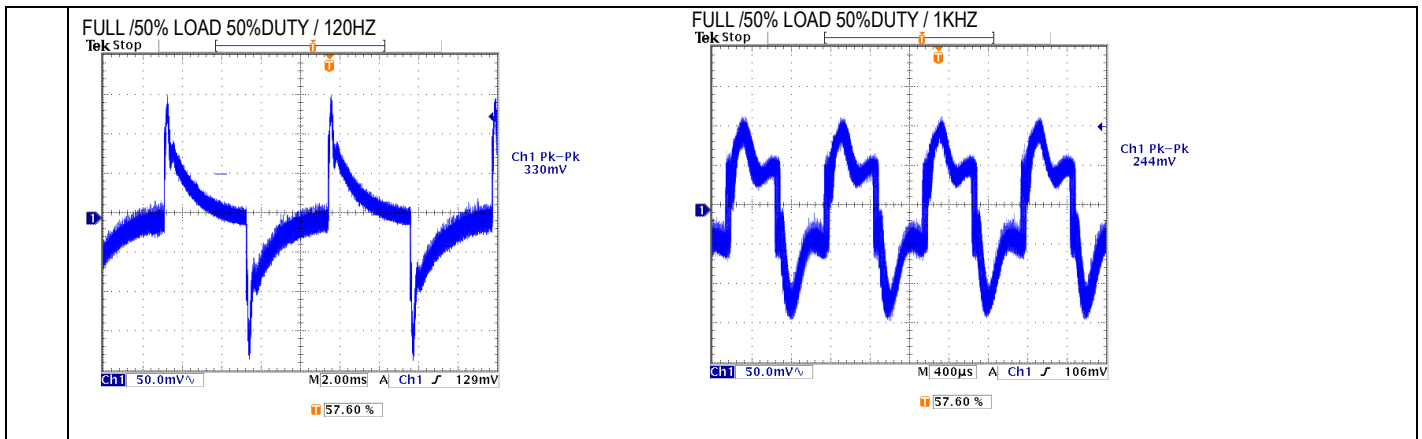


### INPUT FUNCTION TEST

| NO | TEST ITEM             | SPECIFICATION                     | TEST CONDITION  | RESULT                               |
|----|-----------------------|-----------------------------------|---|--------------------------------------|
| 1  | INPUT VOLTAGE RANGE   | 85~132VAC/170~264VAC<br>by switch | I/P:TESTING<br>O/P:FULL LOAD<br>Ta:25°C   | 80V~132V<br>137V~264V                |
|    |                       |                                   | I/P:<br>(1)LOW-LINE-3V=87V<br>HIGH-LINE+15%=300 V<br>O/P:FULL/MIN LOAD<br>(PLEASE CHECK DERATING CURVE)<br>ON: 30 Sec OFF: 30 Sec 10MIN<br>(2)230Vac<br>ON: 0.5 Sec OFF: 0.5 Sec 20MIN<br>(3)230Vac<br>ON:3Sec OFF:3Sec 12HOURS<br>(POWER ON/OFF NO DAMAGE) | TEST: OK                             |
| 2  | INPUT FREQUENCY RANGE | 47HZ ~63 HZ<br>NO DAMAGE          | I/P:170 VAC ~264 VAC<br>O/P:FULL~MIN LOAD<br>Ta:25°C  | TEST: OK                             |
| 3  | INPUT CURRENT (Typ.)  | 230V/ 1.6A<br>115V/2.8 A          | I/P : 230 VAC<br>I/P : 115 VAC<br>O/P : FULL LOAD<br>Ta : 25°C  | I =1.24A/ 230VAC<br>I =2.35A/ 115VAC |
| 4  | LEAKAGE CURRENT       | < 0.75mA / 240 VAC                | I/P : 240 VAC<br>O/P : Min LOAD<br>Ta : 25°C  | L-FG : 0.411mA<br>N-FG : 0.411mA     |
| 5  | NO LOAD CONSUMPTION   | < 0.5 W                           | I/P : 115VAC<br>I/P : 230VAC<br>O/P : NO LOAD<br>Ta : 25°C  | < 0.2992W<br>< 0.3998W               |
| 6  | EFFICIENCY(Typ.)      | 89 %                              | I/P:230 VAC<br>O/P:FULL LOAD<br>Ta:25°C   | 89.23%                               |

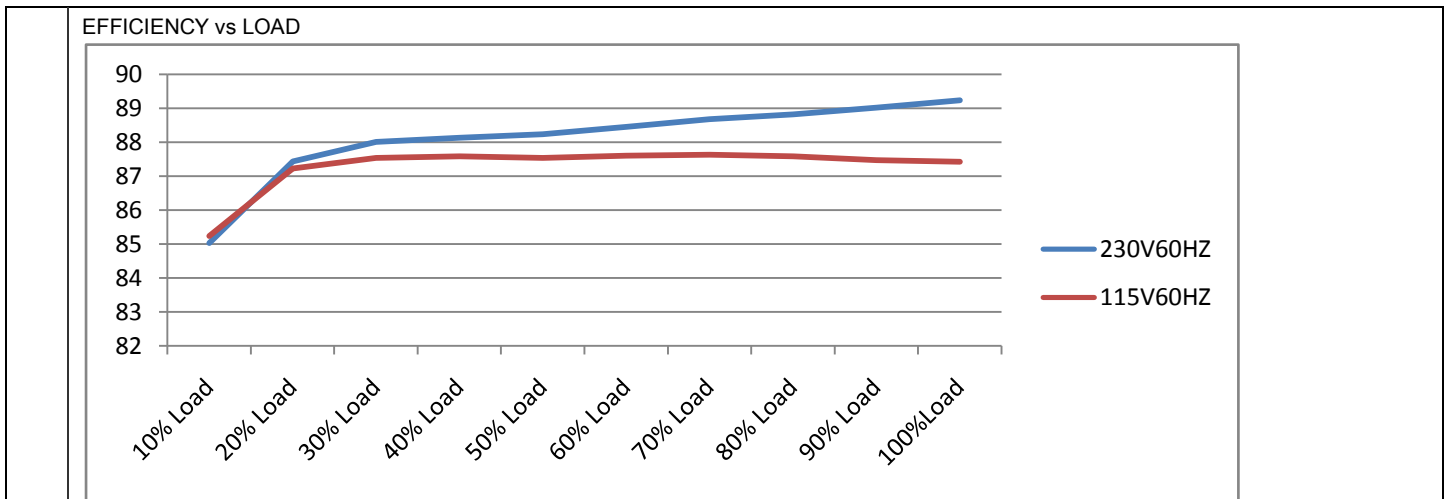

|   |                      |                        |   |                |
|---|----------------------|------------------------|---|----------------|
| 7 | INRUSH CURRENT(Typ.) | 230V/60A<br>COLD START | I/P : 230 VAC<br>O/P : FULL LOAD<br>Ta : 25°C | I =36A/ 230VAC |
|---|----------------------|------------------------|---|----------------|

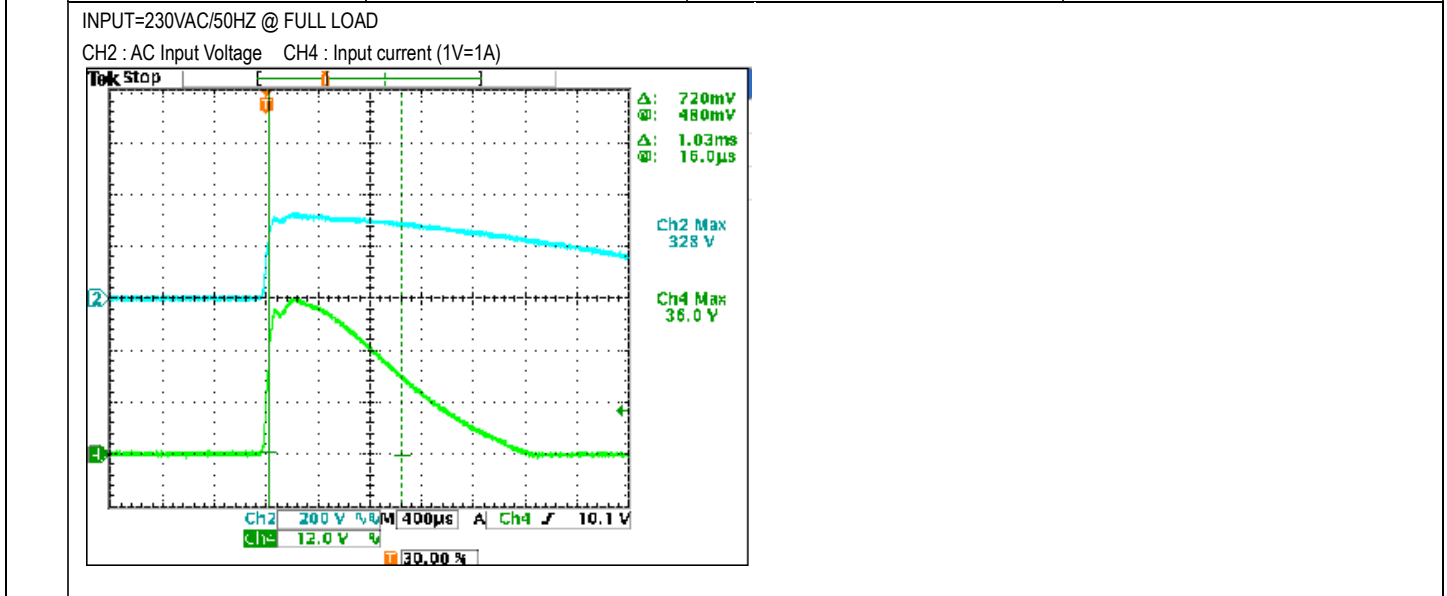

### PROTECTION FUNCTION TEST

| NO | TEST ITEM               | SPECIFICATION  | TEST CONDITION  | RESULT  |
|----|-------------------------|----------------|---|---|
| 1  | OVER LOAD PROTECTION    | 110%~ 140 %    | I/P: 264VAC<br>I/P: 230VAC<br>I/P: 100VAC<br>O/P:TESTING<br>Ta:25°C | 118.61%/ 264VAC<br>118.77%/ 230VAC<br>120.61%/100VAC<br>PROTECTION TYPE :<br>Hiccup mode, recovers automatically after fault condition is removed |
| 2  | OVER VOLTAGE PROTECTION | 28.8 V~ 33.6 V | I/P: 264VAC<br>I/P: 230VAC<br>I/P: 85VAC<br>O/P:MIN LOAD<br>Ta:25°C | 31.7V/ 264VAC<br>31.7V/ 230VAC<br>31.6V/ 85VAC<br>PROTECTION TYPE :<br>Shut down o/p voltage, re-power on to recover                              |

|   |                             |  |  |  |
|---|-----------------------------|--|--|--|
| 3 | OVER TEMPERATURE PROTECTION | NO DAMAGE                              | I/P: 264VAC<br>I/P: 85VAC<br>O/P:FULL LOAD             | O.T.P.Active<br>PROTECTION TYPE :<br>Shut down o/p voltage, re-power on to recover                     |
| 4 | SHORT PROTECTION            | SHORT EVERY OUTPUT<br>1 HOUR NO DAMAGE | I/P: 264VAC<br>I/P: 90VAC<br>O/P: FULL LOAD<br>Ta:25°C | NO DAMAGE<br>PROTECTION TYPE :<br>Hiccup mode, recovers automatically after fault condition is removed |

**COMPONENT STRESS TEST**

| NO | TEST ITEM   | SPECIFICATION   | TEST CONDITION   | RESULT  |
|----|---|---|--|---|
| 1  | PWM Transistor<br><br>( D to S) or (C to E) <b>Peak Voltage</b> | Q 1 Rated<br>:13 A/600V   | I/P:High-Line +3V =267V<br>AC ON/OFF<br>VDS:<br>O/P: (1)Full Load<br>(2)Output Short<br>(3) Dynamic Load 100% Load/<br>Min. Load 50%Duty/120Hz<br>(4) 0%→400% Load.<br>Ta:25°C         | VDS:<br>(1) 562V<br>(2) 472V<br>(3) 578V<br>(4) 574V                      |
| 4  | Diode <b>Peak Voltage</b>                                       | Q101 Rated<br>: 15A/200 V                                       | I/P:High-Line +3V =267 V<br>AC ON/OFF<br>O/P: (1)Full Load<br>(2)Output Short<br>(3) Dynamic Load 100% Load/<br>Min. Load 50%Duty/120Hz<br>(4) 0%→400% Load.<br>(5).NO LOAD<br>Ta:25°C | Q101:<br>VDS:<br>(1) 152V<br>(2) 160V<br>(3) 151V<br>(4) 177V<br>(5) 136V |
| 5  | <b>Input Capacitor Voltage</b>                                  | C5 Rated:<br>: 330 $\mu$ /200 V<br>105 °C<br>Suger Voltage=230V | I/P:High-Line +3V =267 V<br>O/P: (1)Full Load input on/off<br>(2) Min load input on /Off<br>(3)Full Load /Min load Change<br>Ta:25°C   | (1) 154V<br>(2) 156V<br>(3) 156V  |
| 6  | <b>Control IC Voltage Test</b>                                  | PWM IC U1 Rated<br>: 28 V(MAX.)<br>10.5 V(MIN.)                 | I/P:High-Line +3V =267 V<br>AC ON/OFF<br>O/P(1)FULL LOAD<br>(2) Output Short<br>(3)O.L.P<br>(4)O.V.P.<br>(5)NO LOAD VR Min..LOW<br>LINE<br>Ta:25°C                                     | 1. 20.8V<br>2. 12.2V<br>3. 20.3V<br>4. 26.1V<br>5. 16.5V                  |

**SAFETY TEST**

| NO | TEST ITEM            | SPECIFICATION   | TEST CONDITION  | RESULT  |
|----|----------------------|---|---|---|
| 1  | WITHSTAND VOLTAGE    | I/P-O/P: 3.75KVAC/min<br>I/P-FG :2KVAC/min<br>O/P-FG:1.25KVAC/min   | I/P-O/P: 4.125 KVAC/min<br>I/P-FG: 2.4 KVAC/min<br>O/P-FG:1.5 KVAC/min<br>Ta:25°C | I/P-O/P: 3.167mA<br>I/P-FG: 3.51mA<br>O/P-FG: 3.36mA<br>NO DAMAGE |
| 2  | ISOLATION RESISTANCE | I/P-O/P:500VDC>100MΩ<br>I/P-FG: 500VDC>100MΩ<br>O/P-FG:500VDC>100MΩ | I/P-O/P: 500 VDC<br>I/P-FG: 500 VDC<br>O/P-FG: 500 VDC<br>Ta:25°C                 | I/P-O/P:9999MΩ<br>I/P-FG: 9999MΩ<br>O/P-FG:9999MΩ<br>NO DAMAGE    |
| 3  | GROUNDING CONTINUITY | FG(PE) TO CHASSIS<br>OR TRACE < 100 mΩ                              | 40A / 2min<br>Ta:25°C   | 28mΩ  |

**E.M.C TEST**

| NO | TEST ITEM                                   | SPECIFICATION   | TEST CONDITION   | RESULT                        |
|----|---|---|--|-------------------------------|
| 1  | HARMONIC                                    | EN61000-3-2<br>CLASS A                                | I/P:230VAC/50HZ<br>O/P:80% LOAD<br>Ta:25°C               | PASS                          |
| 2  | CONDUCTION                                  | EN55022<br>CLASS B                                    | I/P : 230 VAC (50HZ)<br>O/P : FULL/50% LOAD<br>Ta : 25°C | PASS<br>Test by certified Lab |
| 3  | RADIATION                                   | EN55022<br>CLASS B                                    | I/P : 230 VAC (50HZ)<br>O/P : FULL LOAD<br>Ta : 25°C     | PASS<br>Test by certified Lab |
| 4  | E.S.D                                       | EN61000-4-2<br>INDUSTRY<br>AIR : 8KV / Contact : 4KV  | I/P : 230 VAC/50HZ<br>O/P : FULL LOAD<br>Ta : 25°C       | CRITERIA A                    |
| 5  | E.F.T                                       | EN61000-4-4<br>INDUSTRY<br>INPUT : 2KV                | I/P : 230 VAC/50HZ<br>O/P : FULL LOAD<br>Ta : 25°C       | CRITERIA A                    |
| 6  | SURGE                                       | IEC61000-4-5<br>INDUSTRY<br>L-N : 2KV<br>L,N-PE : 4KV | I/P : 230 VAC/50HZ<br>O/P : FULL LOAD<br>Ta : 25°C       | CRITERIA A                    |
| 7  | Test by certified Lab & Test Report Prepare |   |  |                               |

## RELIABILITY TEST

### ENVIRONMENT TEST

| NO | TEST ITEM   | SPECIFICATION   | TEST CONDITION  | RESULT        |                         |                        |   |           |       |        |   |            |       |       |   |           |       |       |   |            |       |       |   |             |       |        |   |             |       |       |   |            |       |       |   |              |       |       |   |            |       |       |    |           |       |       |  |  |
|----|---|---|---|---------------|-------------------------|------------------------|---|-----------|-------|--------|---|------------|-------|-------|---|-----------|-------|-------|---|------------|-------|-------|---|-------------|-------|--------|---|-------------|-------|-------|---|------------|-------|-------|---|--------------|-------|-------|---|------------|-------|-------|----|-----------|-------|-------|--|--|
| 1  | TEMPERATURE RISE TEST   | MODEL : LRS-150-24<br>1. ROOM AMBIENT BURN-IN : 2 HRS<br>I/P : 230VAC O/P : FULL LOAD Ta=25.5℃<br>2. HIGH AMBIENT BURN-IN : 2 HRS<br>I/P : 230VAC O/P : FULL LOAD Ta=45.3℃  |   |               |                         |                        |   |           |       |        |   |            |       |       |   |           |       |       |   |            |       |       |   |             |       |        |   |             |       |       |   |            |       |       |   |              |       |       |   |            |       |       |    |           |       |       |  |  |
|    |   | <table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta= 25.5 ℃</th> <th>HIGH AMBIENT Ta=45.3 ℃</th> </tr> </thead> <tbody> <tr><td>1</td><td><b>D5</b></td><td>87.8℃</td><td>100.6℃</td></tr> <tr><td>2</td><td><b>C35</b></td><td>63.3℃</td><td>79.4℃</td></tr> <tr><td>3</td><td><b>Q1</b></td><td>80.9℃</td><td>99.3℃</td></tr> <tr><td>4</td><td><b>BD1</b></td><td>72.3℃</td><td>88.2℃</td></tr> <tr><td>5</td><td><b>Q100</b></td><td>86.3℃</td><td>105.3℃</td></tr> <tr><td>6</td><td><b>C106</b></td><td>68.5℃</td><td>85.9℃</td></tr> <tr><td>7</td><td><b>LF1</b></td><td>60.3℃</td><td>77.0℃</td></tr> <tr><td>8</td><td><b>RTH10</b></td><td>60.5℃</td><td>76.5℃</td></tr> <tr><td>9</td><td><b>R14</b></td><td>79.2℃</td><td>95.1℃</td></tr> <tr><td>10</td><td><b>T1</b></td><td>82.2℃</td><td>97.8℃</td></tr> </tbody> </table> | NO  | Position      | ROOM AMBIENT Ta= 25.5 ℃ | HIGH AMBIENT Ta=45.3 ℃ | 1 | <b>D5</b> | 87.8℃ | 100.6℃ | 2 | <b>C35</b> | 63.3℃ | 79.4℃ | 3 | <b>Q1</b> | 80.9℃ | 99.3℃ | 4 | <b>BD1</b> | 72.3℃ | 88.2℃ | 5 | <b>Q100</b> | 86.3℃ | 105.3℃ | 6 | <b>C106</b> | 68.5℃ | 85.9℃ | 7 | <b>LF1</b> | 60.3℃ | 77.0℃ | 8 | <b>RTH10</b> | 60.5℃ | 76.5℃ | 9 | <b>R14</b> | 79.2℃ | 95.1℃ | 10 | <b>T1</b> | 82.2℃ | 97.8℃ |  |  |
| NO | Position  | ROOM AMBIENT Ta= 25.5 ℃   | HIGH AMBIENT Ta=45.3 ℃  |               |                         |                        |   |           |       |        |   |            |       |       |   |           |       |       |   |            |       |       |   |             |       |        |   |             |       |       |   |            |       |       |   |              |       |       |   |            |       |       |    |           |       |       |  |  |
| 1  | <b>D5</b>   | 87.8℃   | 100.6℃  |               |                         |                        |   |           |       |        |   |            |       |       |   |           |       |       |   |            |       |       |   |             |       |        |   |             |       |       |   |            |       |       |   |              |       |       |   |            |       |       |    |           |       |       |  |  |
| 2  | <b>C35</b>  | 63.3℃   | 79.4℃   |               |                         |                        |   |           |       |        |   |            |       |       |   |           |       |       |   |            |       |       |   |             |       |        |   |             |       |       |   |            |       |       |   |              |       |       |   |            |       |       |    |           |       |       |  |  |
| 3  | <b>Q1</b>   | 80.9℃   | 99.3℃   |               |                         |                        |   |           |       |        |   |            |       |       |   |           |       |       |   |            |       |       |   |             |       |        |   |             |       |       |   |            |       |       |   |              |       |       |   |            |       |       |    |           |       |       |  |  |
| 4  | <b>BD1</b>  | 72.3℃   | 88.2℃   |               |                         |                        |   |           |       |        |   |            |       |       |   |           |       |       |   |            |       |       |   |             |       |        |   |             |       |       |   |            |       |       |   |              |       |       |   |            |       |       |    |           |       |       |  |  |
| 5  | <b>Q100</b>   | 86.3℃   | 105.3℃  |               |                         |                        |   |           |       |        |   |            |       |       |   |           |       |       |   |            |       |       |   |             |       |        |   |             |       |       |   |            |       |       |   |              |       |       |   |            |       |       |    |           |       |       |  |  |
| 6  | <b>C106</b>   | 68.5℃   | 85.9℃   |               |                         |                        |   |           |       |        |   |            |       |       |   |           |       |       |   |            |       |       |   |             |       |        |   |             |       |       |   |            |       |       |   |              |       |       |   |            |       |       |    |           |       |       |  |  |
| 7  | <b>LF1</b>  | 60.3℃   | 77.0℃   |               |                         |                        |   |           |       |        |   |            |       |       |   |           |       |       |   |            |       |       |   |             |       |        |   |             |       |       |   |            |       |       |   |              |       |       |   |            |       |       |    |           |       |       |  |  |
| 8  | <b>RTH10</b>  | 60.5℃   | 76.5℃   |               |                         |                        |   |           |       |        |   |            |       |       |   |           |       |       |   |            |       |       |   |             |       |        |   |             |       |       |   |            |       |       |   |              |       |       |   |            |       |       |    |           |       |       |  |  |
| 9  | <b>R14</b>  | 79.2℃   | 95.1℃   |               |                         |                        |   |           |       |        |   |            |       |       |   |           |       |       |   |            |       |       |   |             |       |        |   |             |       |       |   |            |       |       |   |              |       |       |   |            |       |       |    |           |       |       |  |  |
| 10 | <b>T1</b>   | 82.2℃   | 97.8℃   |               |                         |                        |   |           |       |        |   |            |       |       |   |           |       |       |   |            |       |       |   |             |       |        |   |             |       |       |   |            |       |       |   |              |       |       |   |            |       |       |    |           |       |       |  |  |
| 2  | OVER LOAD BURN-IN TEST  | NO DAMAGE<br>1 HOUR ( MIN )   | I/P : 230 VAC<br>O/P : 120% LOAD<br>Ta : 25℃                                    | TEST : OK     |                         |                        |   |           |       |        |   |            |       |       |   |           |       |       |   |            |       |       |   |             |       |        |   |             |       |       |   |            |       |       |   |              |       |       |   |            |       |       |    |           |       |       |  |  |
| 3  | LOW TEMPERATURE<br>TURN ON TEST                                   | TURN ON AFTER 2 HOUR  | I/P : 264VAC<br>O/P : 100 % LOAD<br>I/P : 100VAC<br>O/P : 75% LOAD<br>Ta= -30 ℃ | TEST : OK     |                         |                        |   |           |       |        |   |            |       |       |   |           |       |       |   |            |       |       |   |             |       |        |   |             |       |       |   |            |       |       |   |              |       |       |   |            |       |       |    |           |       |       |  |  |
| 4  | HIGH HUMIDITY<br>HIGH TEMPERATURE<br>HIGH VOLTAGE<br>TURN ON TEST | AFTER 12 HOURS<br>IN CHAMBER ON<br>CONTROL 50 ℃<br>NO DAMAGE  | I/P : 272 VAC<br>O/P : FULL LOAD<br>Ta= 50 ℃<br>HUMIDITY= 95 %R.H               | TEST : OK     |                         |                        |   |           |       |        |   |            |       |       |   |           |       |       |   |            |       |       |   |             |       |        |   |             |       |       |   |            |       |       |   |              |       |       |   |            |       |       |    |           |       |       |  |  |
| 5  | TEMPERATURE<br>COEFFICIENT  | ±0.03 %/℃ (0~50℃)   | I/P : 230 VAC<br>O/P : FULL LOAD  | ±0%/℃ (0~50℃) |                         |                        |   |           |       |        |   |            |       |       |   |           |       |       |   |            |       |       |   |             |       |        |   |             |       |       |   |            |       |       |   |              |       |       |   |            |       |       |    |           |       |       |  |  |
| 6  | STORAGE TEMPERATURE TEST  | 1. Thermal shock Temperature : -40℃~ +85℃<br>2. Temperature change rate : 25℃ / MIN<br>3. Dwell time low and high temperature : 30 MIN/EACH<br>4. Total test cycle : 5 CYCLE<br>5. Input/Output condition : STATIC  |   | OK            |                         |                        |   |           |       |        |   |            |       |       |   |           |       |       |   |            |       |       |   |             |       |        |   |             |       |       |   |            |       |       |   |              |       |       |   |            |       |       |    |           |       |       |  |  |
| 7  | THERMAL SHOCK TEST  | 1. Thermal shock Temperature : -30℃~ 70℃<br>2. Temperature change rate : 25℃ / MIN<br>3. Dwell time low and high temperature : 30 MIN/EACH<br>4. Total test cycle : 10 CYCLE<br>5. Input/Output condition : 230VAC/Full Load AC ON/OFF TEST<br>turn on 58sec ; turn off 2sec  |   | OK            |                         |                        |   |           |       |        |   |            |       |       |   |           |       |       |   |            |       |       |   |             |       |        |   |             |       |       |   |            |       |       |   |              |       |       |   |            |       |       |    |           |       |       |  |  |
| 8  | VIBRATION TEST  | 1 Carton & 1 Set<br>(1) Waveform : Sine Wave<br>(2) Frequency : 10~500Hz<br>(3) Sweep Time : 10min/sweep cycle<br>(4) Acceleration : 5G<br>(5) Test Time : 60min in each axis (X.Y.Z)<br>(6) Ta : 25℃   |   | TEST : OK     |                         |                        |   |           |       |        |   |            |       |       |   |           |       |       |   |            |       |       |   |             |       |        |   |             |       |       |   |            |       |       |   |              |       |       |   |            |       |       |    |           |       |       |  |  |





|    |                             |  |   |
|----|-----------------------------|--|---|
| 9  | CAPACITOR<br>LIFE CYCLE     | SUPPOSE C106 IS THE MOST CRITICAL COMPONENT<br>(1) I/P : 230VAC O/P : FULL LOAD Ta= 25 °C LIFE TIME<br>(2) I/P : 230VAC O/P : FULL LOAD Ta=50 °C LIFE TIME<br>(3) I/P : 230VAC O/P : 75% LOAD Ta= 50 °C LIFE TIME<br>(4) I/P : 230VAC O/P : 50% LOAD Ta= 50 °C LIFE TIME | (1) 146770HRS<br>(2) 30596HRS<br>(3) 54079HRS<br>(4) 92239HRS |
| 10 | MTBF                        | MIL-HDBK-217F<br>TOTAL FAILURE RATE : 601KHRS  |   |
| 11 | DMTBF/Accelerated Life Test | Demonstration Mean Time Between Failure (Expected Life): Above 30,000 hours @ TA 50°C  |   |

| TEST RESULT | TESTER | APPROVAL |
|-------------|--------|----------|
| PASS        | FRANK  | WANGDZ   |

2007/3/20 A50-S014